

# **SOUNDWIN** 2 -4 Analog Lines FXS/FXO VoIP Gateway




*The Soundwin S200/S400 Series VoIP Gateway is fully both SIP and H.323 standard compliant residential gateway that provides a total solution for integrating voice-data network and PSTN. By simple installation, this revolutionary compact voice over IP (VoIP) gateway could be configured as a 2/4 port FXS/FXO VoIP Gateway which provides voice connectivity over the IP network and to the Public Switched Telephone Network (PSTN). The Soundwin Gateway is equipped with a four port Ethernet switch and built-in NAT router function that provides Internet access using only one IP address. Besides, it provides high voice quality and optimized packet voice streaming over managed and public (Internet) IP networks.*

## **VoIP Key Features**

- ❏ Both support SIP and H.323 protocols: SIP Registration and Digest Authentication and H.323 Gatekeeper Registration.
- ❏ Single Number / Account for multiple ports.
- ❏ Caller ID Delivery and Detection: FXS supports DTMF&FSK Caller ID generation; FXO supports DTMF&FSK Caller ID detection. **(Optional)**
- ❏ Smart VoIP call Dialing Book: VoIP call Book could provide any application VoIP call to any type destination (Domain name / IP address, PSTN or PBX) or hunting number setting.
- ❏ AC termination Impedance : 600/900 OHM and complex impedance
- ❏ Answer Supervision for Polarity Reversal Detection and Voice detection
- ❏ NAT traversal: This feature allow gateway to operate behind any NAT/Firewall device. There is no need to change any configuration of NAT/Firewall like setting virtual server.
- ❏ Smart-QoS: This feature provides good voice quality when user place a VoIP call and access internet at the same time. The gateway will automatically start to reserve bandwidth for voice traffic when VoIP call proceeds.
- ❏ Call Hunting Facility: This function helps gateway to use the lines effectively. This facility automatically transfers your incoming call to a free line. Subscribers need not indicate numerous numbers of each port of gateway.
- ❏ Voice channels status display: This function display each port status like as onhook, offhook, calling number callee's number, talk duration, codec.
- ❏ Pulse Dial support: Support pulse dialing generation and detection. **(Optional)**
- ❏ Flash Detection and Generation Program: FXO support Flash Generation and FXS support Flash Detection.

## Application Scenario:

The following application was used in Multi-Office as an example:

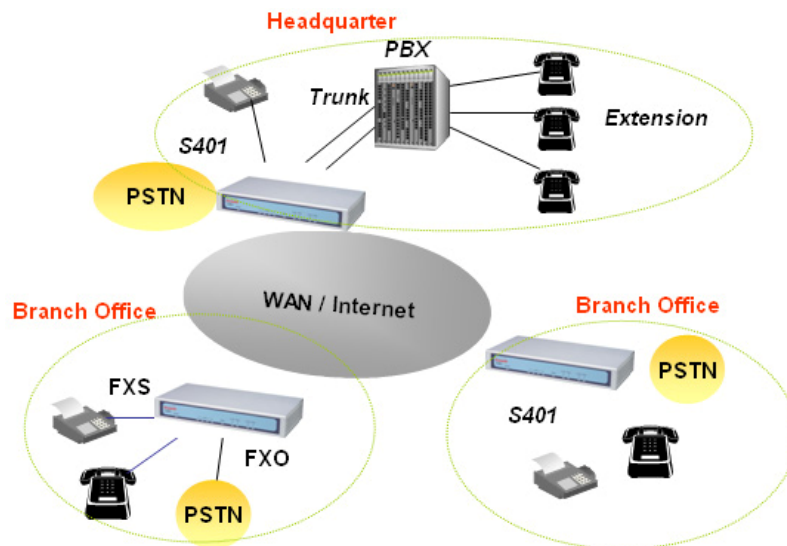

## Telephony Specification:

- ☒ Voice Codec: G.711(A-law /  $\mu$ -law), G.729 AB, G.723 (6.3 Kbps / 5.3Kbps)
- ☒ FAX support : T.30 / T.38
- ☒ Echo Cancellation: G.165/G168
- ☒ FXO Caller ID detection : DTMF and FSK (**Optional**)
- ☒ FXO hang up detection / anti-seized : Tone Learning Automatically / Manual Tone Learning (**Optional**)
- ☒ Answer supervision: Support Battery Reverse Detection and Voice Detection.
- ☒ FXO answer delay time: Support delay 0 – 8000 ms to answer.
- ☒ Adjustable AC Termination Impedance : 600 / 900 OHM and complex Impedance
- ☒ Failsafe Mechanism (FXS relay to FXO) : Power failed by pass support / Internet Failed by pass (**Optional**)
- ☒ 12K Hz and 16K Hz Metering (**Customized**)

## IP Specifications:

- ☒ H.323 v2/v3/v4 and SIP (RFC 3261) , SDP (RFC 2327), Symmetric RTP, STUN (RFC3489), ENUM (RFC 2916), RTP Payload for DTMF Digits (RFC2833), Outbound Proxy Support.
- ☒ LAN :Support Virtual Server, DHCP Server
- ☒ WAN: Support PPPoE client, DHCP client, Fix IP Address, DDNS client
- ☒ Network Address Translation: Providing build-in NAT router function.
- ☒ Smart QoS: Guarantee the voice bandwidth
- ☒ IP TOS (IP Precedence) / DiffServ

## Call Features

- ☒ Voice channels status display
- ☒ Direct Dialing Mode : peer to peer call (support IP Address Call or Domain Name Call)

- ☒ Register Call Mode : register to SIP Proxy Server or H.323 Gatekeeper
- ☒ Adjustable volume : - 9 db ~ 9 db
- ☒ Silence Compression
- ☒ Auto Dial for speed
- ☒ Dynamic Jitter Buffer
- ☒ Hot-Line Support

#### 🔴 **Configuration & Management**

- ☒ Web-based Graphical User Interface
- ☒ Remote management over the IP Network
- ☒ FTP firmware upgrade
- ☒ Backup and Restore Configuration file
- ☒ Syslog support

#### 🔴 **General Specification**

- ☒ AC power : AC100V-240V, DC12V/1.5A,50/60 Hz
- ☒ Temperature: 0°C ~ 40°C (Operation)
- ☒ Humidity: up to 90% non-condensing
- ☒ Emission: FCC Part 15 Class B, CE Mark
- ☒ Dimension : 260 x 130 x 35 mm
- ☒ Weight: 900g (Aluminum )

## S400/200 VoIP Gateway Catalogue

	S400	S401	S402	S404	S200	S201	S202
<i>Ethernet Port</i>	4 LAN + 1 WAN						
<i>Telephony Interface</i>	Quad RJ-11				Dual RJ-11		
<i>FXS/FXO</i>	4FXS	3FXS+1FXO	2FXS+2FXO	4FXO	2FXS	1FXS+1FXO	2FXO
<i>H.323 v2/v3/v4</i>	✓	✓	✓	✓	✓	✓	✓
<i>SIP(RFC3261)</i>	✓	✓	✓	✓	✓	✓	✓
<i>Smart-Qos</i>	✓	✓	✓	✓	✓	✓	✓
<i>NAT Traversal</i>	✓	✓	✓	✓	✓	✓	✓
<i>Echo Cancellation</i>	✓	✓	✓	✓	✓	✓	✓
<i>G.711 a/u law</i> <i>G.723, G729AB</i>	✓	✓	✓	✓	✓	✓	✓
<i>T.38/T.30</i>	✓	✓	✓	✓	✓	✓	✓
<i>NAT Router</i>	✓	✓	✓	✓	✓	✓	✓
<i>DHCP server for Private Network</i>	✓	✓	✓	✓	✓	✓	✓

Soundwin Network, Inc. - Headquarters  
10F-4, No. 295, Sec. 2, Guangfu Rd.,  
Hsinchu City, Taiwan

Tel: +886-3-5733113

Fax: +886-3-5736131

E-mail: [sales@soundwin.com](mailto:sales@soundwin.com)

Web Site: <http://www.soundwin.com>